

LUXURON

INSTALLATION INSTRUCTIONS




WIRING INSTRUCTIONS

LICENSED ELECTRICIAN

For safety reasons, it is recommended to have a licensed electrician install Luxuron power blind wiring.

WIRING CONNECTIONS

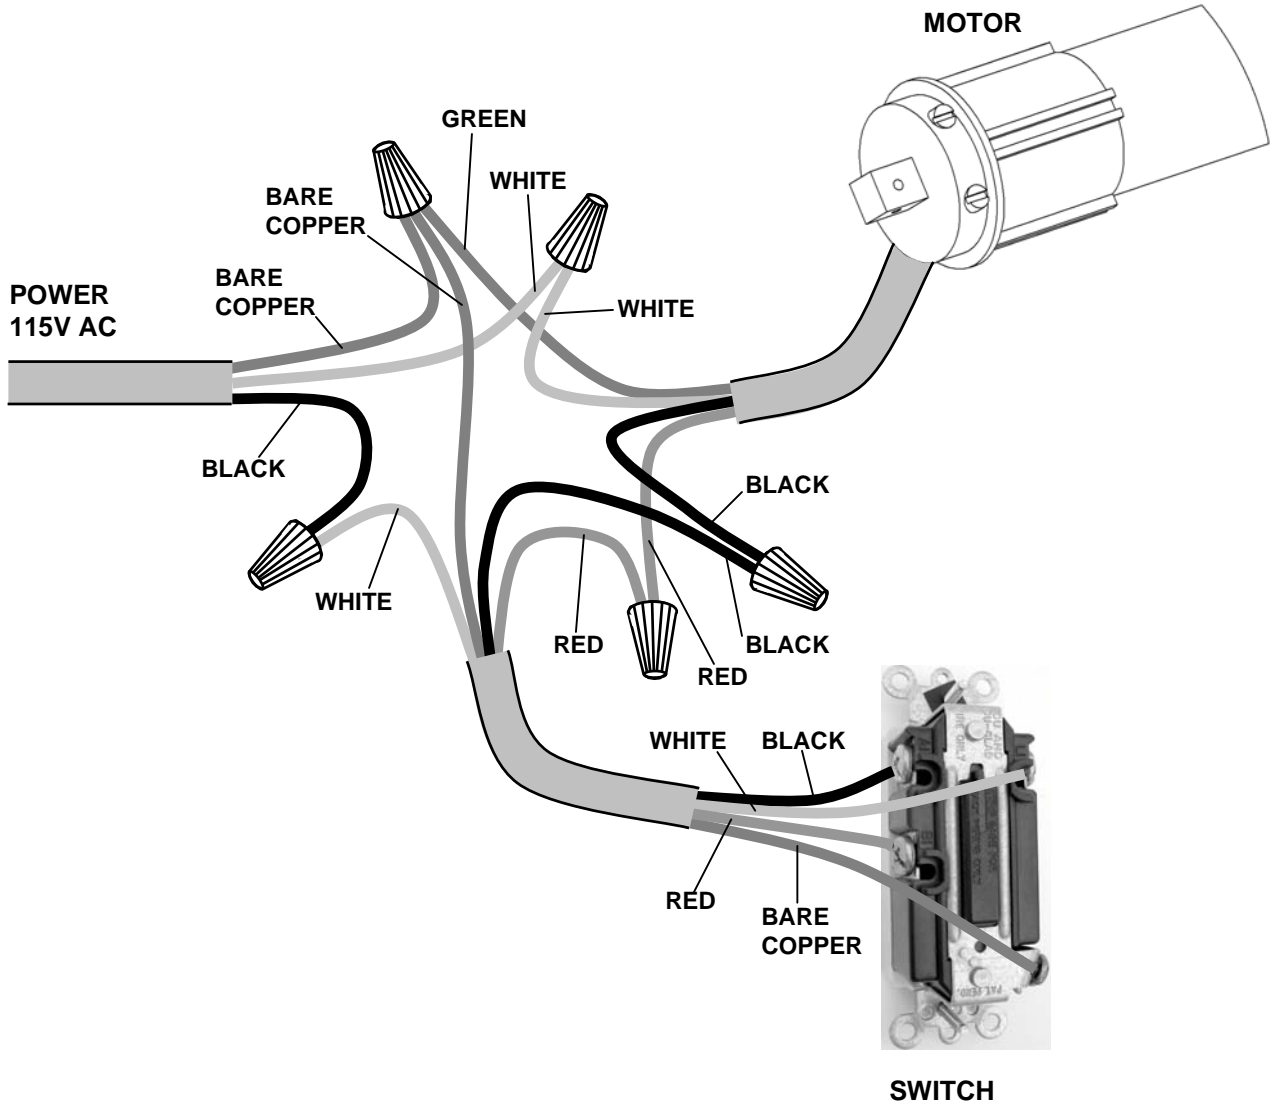

ADJUSTING THE LIMIT SWITCHES


CAUTION

The limit switches have been pre-set at the factor and should not require adjustment. Nevertheless, instructions for adjusting the limit switches are detailed below. **Warning: Adjusting the limit switches is not recommended and should be done with extreme caution. Permanent damage to the window covering, and physical injury can occur. Damage that occurs as a result of mis-adjusting the limit switches will void the warranty.**

LIMIT SWITCH ADJUSTMENTS

Luxuron motorized blinds have 2 limit settings that are set by adjusting the limit switch screw at the bottom of the headrail:

- 1) Upper Lift Limit -- the maximum height that the motor will lift the slats.
- 2) Lower Lift Limit -- the maximum position to which the motor will lower the slats.

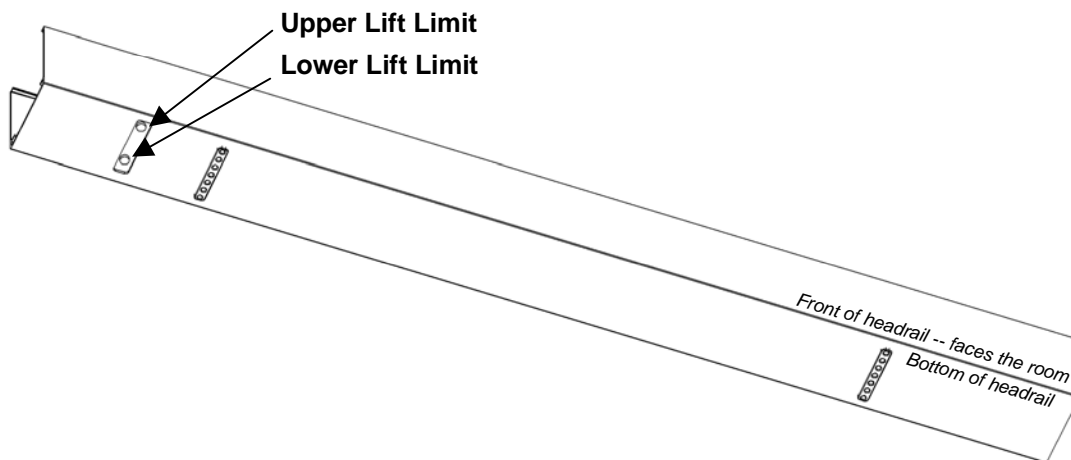

ADJUSTING THE LIMIT SWITCHES



To adjust the limit switches, use the limit switch adjustment tool.




Rotate the adjustment screw clockwise to increase the travel limit. Rotate the adjustment screw counterclockwise to decrease the travel limit.

OPERATING THE BLIND


LUXURON OPERATING INSTRUCTIONS

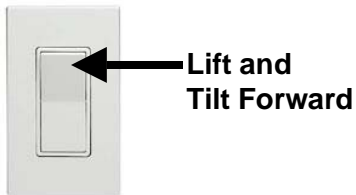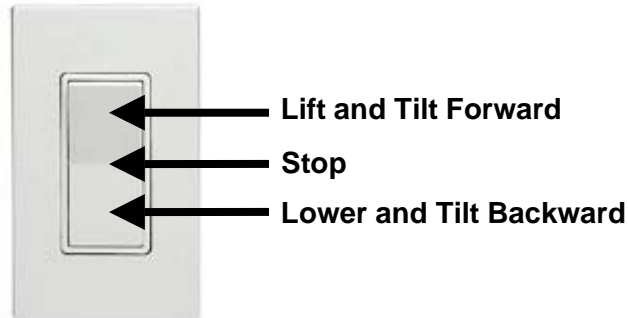

Press the up side of the switch to make the blind rise and simultaneously tilt forward. Slats will tilt while rising until reaching the tilt limit.

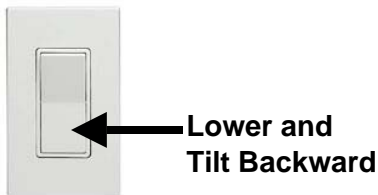

Press the down side of the switch to make the blind lower and simultaneously tilt backward. Slats will tilt while lowering until reaching the tilt limit.



Move the switch to the center position to stop the lifting or tilting at any time.